


# TYLÖ®

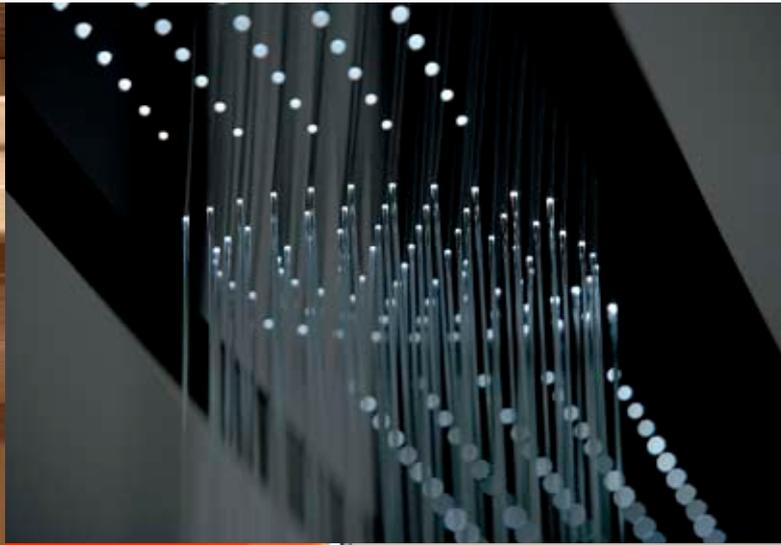

S A U N A S

S H O W E R S

S T E A M B A T H S



## Sauna doors.

Every door that bears the Tylö name is of the very highest quality, specially manufactured to withstand the extreme differences in temperature inside and outside the sauna without warping or becoming deformed. All Tylö doors are equipped with a safe, reliable magnetic catch and can be hung to open either left or right.

Would you like a sauna door in a different size or different material? Simply request a quotation.



### Sauna door DW-190 Spruce

(Art. no. 9103 0010)

Classic model with one large window in tinted, tempered safety glass and beautiful knot-free spruce panelling inside and out. Frame size: 1850 x 710 x 68 mm, width of opening 1738 x 598 mm.

### Sauna door DW-190 Aspen

(Art. no. 9103 0000)

As above, but panelled inside and out with blonde aspen. Frame size: 1850 x 710 x 68 mm, width of opening 1738 x 598 mm.

### Sauna door DGM-63-190 Aspen

(Art. no. 9103 1050)

Door of tinted, tempered safety glass set in a frame of aspen. Sturdy aluminium hinges concealed beneath a decorative, stainless steel housing. Comes complete with silicone sealing strip. Frame size: 1850 x 622 x 68 mm, width of opening 1738 x 510 mm.

### Sauna door DGM-63-190

#### Spruce

(Art. no. 9103 1060)

As above, but with a door frame of aspen.

### Sauna door DGM-63-190

#### Spruce Clear glass

(Art. no. 9103 1065)

As above, with spruce frame and clear, tempered safety glass.

### Sauna door DGM-72 -190

As above, but with tinted, tempered safety glass, frame 1850 x 710 x 68 mm and width of opening 1738 x 598 mm.

Door frame of spruce (Art. 9103 1020)

Door frame of aspen (Art. 9103 1000)

Door frame of alder (Art. 9103 1010)

Door frame of beech (Art. 9103 1015)

### Sauna door DGM-72-190 Spruce Clear glass

(Art. no. 9103 1025)

As above, with spruce frame and clear, tempered safety glass.

### Sauna door DGM-72-200 Spruce

(Art. no. 9103 1030)

As above, but with tinted, tempered safety glass, spruce frame 2000 x 710 x 68 mm and width of opening 1888 x 598 mm.

### Sauna door DGM-72-210 Spruce

(Art. no. 9103 1040)

As above. Frame size: 2100 x 710 x 68 mm, width of opening 1988 x 598 mm.



**Sauna door DGM-93T-210 Spruce**  
(Art. no. 9103 1070)

Door of tinted, tempered safety glass set in a frame of spruce. Sturdy aluminium hinges concealed beneath a decorative, stainless steel housing. Comes complete with silicone sealing strip. An extra wide opening and no sill for easy wheelchair access.

The door leaf is reinforced with a protective, stainless steel edging strip. Frame size: 2100 x 930 x 68 mm, width of opening 2029 x 818 mm.



**Sauna door DGP-190 Alder**  
(Art. no. 9103 2010)

Exclusive sauna door in 6 mm tinted, tempered safety glass set in a sturdy frame of solid alder. Magnetic catch. The elegant handle runs the full height of the door. Frame size: 1850 x 710 x 68 mm, width of opening 1738 x 598 mm.

**Sauna door DGP-190 Aspen**  
(Art. no. 9103 2000)

As above, but with a frame of aspen. Frame size: 1850 x 710 x 68 mm, width of opening 1738 x 598 mm.

**Sauna door DGP-190 Beech**  
(Art. no. 9104 2010)

As above, but with a frame of solid beech.



### Sauna door DGR-190 Alder

(Art. no. 9103 2020)

A truly exclusive sauna door. Made of bowed 6 mm tinted, tempered safety glass in a frame of solid alder. Handle with magnetic catch. Frame size: 1900 x 786 x 71 mm, width of opening 1788 x 618 mm.

### Sauna door DGR-190 Beech

(Art. no. 9104 2020)

As above, but with a frame of solid beech.



### Automatic door-closer

(Art. no. 9030 1030)

Fits to the side of the door with the hinges, to close the door from a fully open position. For gentle, controlled closure, complement this with the hydraulic shutting device described below.



### Shutting device for wooden doors

(Art. no. 9030 1000)

May be combined with the door-closer above to close wooden sauna doors gently and smoothly.

### Shutting device for glass doors

(Art. no. 9030 1010)

May be combined with the door-closer above to close glass sauna doors gently and smoothly.

